


How to specify JSON payload or multi level parameters in a test case?

To specify JSON payload or multi level parameters, follow the below steps:

1. First specify a header of "Content-Type" of appropriate value in "Request" >> "Headers" sub-tab for a test case if the request body format is other than JSON / XML.
2. Then specify the request payload (either json or xml or any other type) in "Raw Body" sub-tab. Please find below few sample screenshots for setting the request body.

Examples:

1. Setting request body as JSON array

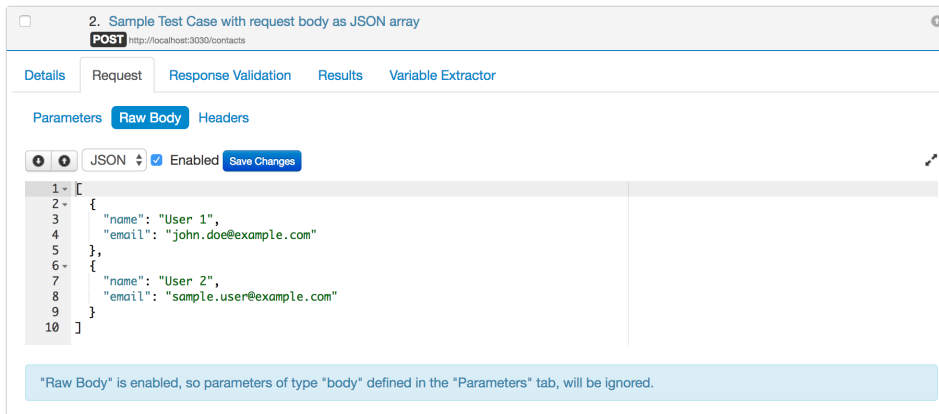

The screenshot shows a test case titled "2. Sample Test Case with request body as JSON array". The "Raw Body" tab is selected, and the "JSON" format is chosen. The payload is a JSON array containing two user objects. A note at the bottom states: "Raw Body" is enabled, so parameters of type "body" defined in the "Parameters" tab, will be ignored.

```
1 [
2 {
3   "name": "User 1",
4   "email": "john.doe@example.com"
5 },
6 {
7   "name": "User 2",
8   "email": "sample.user@example.com"
9 }
10 ]
```

2. Setting request body as JSON object



The screenshot shows a test case titled "3. Sample Test Case with request body as JSON object". The "Raw Body" tab is selected, and the "JSON" format is chosen. The payload is a JSON object representing a user with an address. A note at the bottom states: "Raw Body" is enabled, so parameters of type "body" defined in the "Parameters" tab, will be ignored.

```
1 {
2   "name": "User 1",
3   "email": "john.doe@example.com",
4   "address": {
5     "addressLine1": "123, XYZ",
6     "state": "XYZ",
7     "country": "ABC",
8     "pincode": 123456
9   }
10 }
```